TTC 508 – High Performance Safety Controller

General Description

TTC 508 is a high-end electronic control solution for the automotive industry. The core of the controller is the powerful TMS570 CPU designed for use in demanding safety-critical automotive and transportation applications. The TTC 508 fulfills safety requirements up to SIL 2 (IEC 61508) / PL d (ISO 13849) and AgPL d (ISO 25119).

The TTC 508 is part of a complete and compatible product family and is protected by a compact, automotive-style housing suited to mobile applications.

Specifications

Parameter		Unit
ECU dimensions	231.3 x 204.9 x 38.8	mm
Dimensions for minimum connector release clearance	315.3 x 204.9 x 38.8	mm
Weight	1,200	g
Connector	154	pins
Operating temperature	-40 to +85	°C
Operating altitude	0 to 4,000	m
Supply voltage	8 to 32	V
Peak supply voltage	45	V_{max}
Supply current at 12/24 V without load	400/200	mA_{max}
Standby current	<1	mA_{max}
Total load current	40	A_{max}
Standards		
Functional safety	IEC 61508 SIL2 EN ISO 13849 PL d ISO 25119 AgPL d	
CE-Mark	2014/30/EU 2006/42/EC	
E-Mark	ECE-R10 Rev.4	
EMC	EN 13309 ISO 14982 CISPR 25	
ESD	ISO 10605	
Electrical	ISO 16750-2 ISO 7637-2,-3	
Ingress protection	EN 60529 IP67 ISO 20653 IP6k9k	
Climatic	ISO 16750-4	
Mechanical	ISO 16750-3	
ISOBUS	ISO 11783	

Software
- C-Programming environment

Features

CPU Core
- 32-bit TI TMS570, ARM cortex-R4F based
- Dual-core lockstep CPU and memory protection for safety-relevant applications
- 180 MHz, 298 DMIPS, Floating-Point Unit
- 3 MB int. Flash, 256 kB int. RAM
- 16 MB ext. Flash, 2 MB ext. RAM, 64 kB ext. EEPROM
- Safety Companion CPU

Interfaces
- 2 x CAN 50 kbit/s up to 1 Mbit/s
- 1 x CAN ISOBUS
- 3 x CAN bus termination configurable via connector pins
- 1 x 100BASE-T1 BroadR-Reach®
- 1 x Real-Time Clock

Outputs
- 10 x PWM OUT or digital OUT, up to 4 A, high side, with high side current measurement
- 8 x digital OUT up to 4 A, high side, overload and open load detection, current sense alternative use as LED control OUT or analog IN 12-bit, 0 - 32 V with configurable pull-up/down
- 8 x digital OUT up to 4 A, low side, current sense, overload and open load detection, alternative use as analog IN 12-bit, 0 - 32 V
- Wiring option to use up to 8 of the digital OUT, high side and 8 digital OUT, low side, as full H-bridge for motor control

Multi-purpose I/Os
- 6 x configurable as
  - PVG OUT, 10 - 90% of BAT+ or
  - voltage OUT, 0 - 100% of BAT+ or
  - digital OUT up to 4 A high side or
  - LED control OUT or
  - analog IN 12 bit, 0 - 32 V

Inputs
- 8 x analog IN 12-bit, 0 - 5 V, 0 - 25 mA, 0 - 100 kOhm
- 8 x analog IN 12-bit, 0 - 5 V, 0 - 10 V, 0 - 25 mA
- 8 x analog IN 12-bit, 0 - 5 V, 0 - 32 V, 0 - 25 mA
- 6 x digital timer IN (0.1 Hz - 20 kHz), encoder supporting digital voltage sensors with configurable pull-up/down, digital (7/14 mA) current loop speed-sensor alternative use as analog IN 12-bit, 0 - 32 V
- 6 x digital timer IN (0.1 Hz - 20 kHz), encoder supporting digital voltage sensors with configurable pull-up/down, alternative use as analog IN 12-bit, 0 - 32 V
- 8 x digital timer IN (0.1 Hz - 10 kHz) with pull-up
- K15 and wake up

Sensor supply
- 1 x sensor supply, 5 V, max. 500 mA

All I/Os and interfaces are protected against short circuits to GND and BAT+ and can be configured by software.
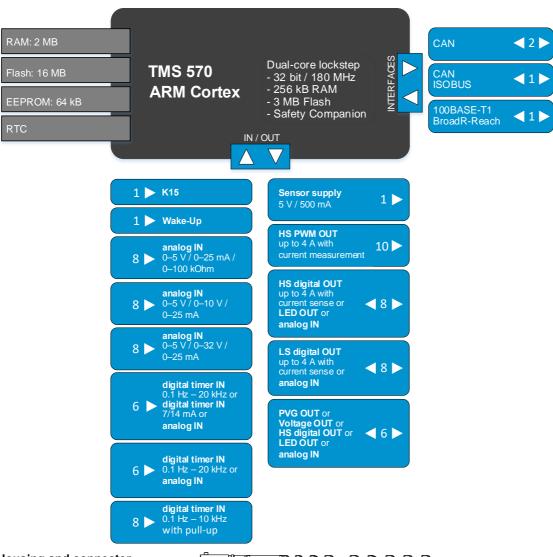
Board temperature, sensor supply and supply voltage are monitored by software.

Inputs and Outputs can also be used as digital Inputs. Two independent shut-off groups for PWM output stages are available. Details about the standards can be found in the System Manual.
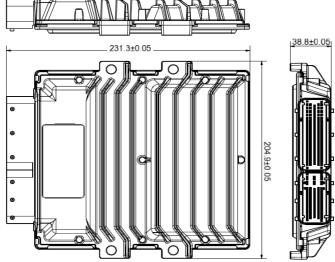
TTC 508

Block Diagram

RAM: 2 MB	
Flash: 16 MB	**TMS 570 ARM Cortex**
EEPROM: 64 kB	Dual-core lockstep
RTC	- 32 bit / 180 MHz

INTERFACES

CAN ◄ 2 ►

CAN ISOBUS ◄ 1 ►

100BASE-T1 BroadR-Reach ◄ 1 ►

Dual-core lockstep
- 32 bit / 180 MHz
- 256 kB RAM
- 3 MB Flash
- Safety Companion

IN / OUT

1 ► K15

1 ► Wake-Up

8 ► **analog IN** 0–5 V / 0–25 mA / 0–100 kOhm

8 ► **analog IN** 0–5 V / 0–10 V / 0–25 mA

8 ► **analog IN** 0–5 V / 0–32 V / 0–25 mA

6 ► **digital timer IN** 0.1 Hz – 20 kHz or **digital timer IN** 7/14 mA or **analog IN**

6 ► **digital timer IN** 0.1 Hz – 20 kHz or **analog IN**

8 ► **digital timer IN** 0.1 Hz – 10 kHz with pull-up

Sensor supply 5 V / 500 mA 1 ►

HS PWM OUT up to 4 A with current measurement 10 ►

HS digital OUT up to 4 A with current sense or **LED OUT** or **analog IN** ◄ 8 ►

LS digital OUT up to 4 A with current sense or **analog IN** ◄ 8 ►

PVG OUT or **Voltage OUT** or **HS digital OUT** or **LED OUT** or **analog IN** ◄ 6 ►

Housing and connector

Aluminum die-cast housing

154-pin connector

231.3±0.05

38.8±0.05

204.9±0.05

For further information, including price and availability, please contact products@tttech-auto.com.